

# NU GREEN<sup>®</sup> FR mdf

## FIRE-RATED



### PRODUCT DESCRIPTION

Uniboard<sup>®</sup> NU Green FR MDF is an engineered wood product that uses a special chemical system to achieve a Class A / Class 1 fire rated panel. NU Green FR MDF is designed for interior use in residential, commercial and institutional applications, where a non-structural panel is required.

For Surface Burning Characteristics of Building Materials, this product meets:

**ASTM E-84 – Class A / Class 1**


Flame Spread Index : 0-25

Smoke Development Index: 450 Maximum

**CAN/ULC-S102-10** contains no performance criteria of its own. The National Building Code of Canada (NBCC) or other jurisdictional documentation should be referenced to determine the FSR and/or SDC performance criteria that is applicable to the product for the intended application.

For easy handling, NU Green FR MDF is offered in lift quantities in a multitude of standard North American panel sizes. This product is available as raw panels or with Uniboard's award winning TFL color collection. A specially formulated red dye has been added to NU Green FR MDF to distinguish it as an FR panel. Uniboard NU Green FR MDF panels are sanded to 150 grits.

With 100% pre-consumer recycled wood content, NU Green FR MDF is excellent for veneering, painting, cutting, and routing applications. This product is FSC<sup>®</sup> certified and meets NAF emission standards.

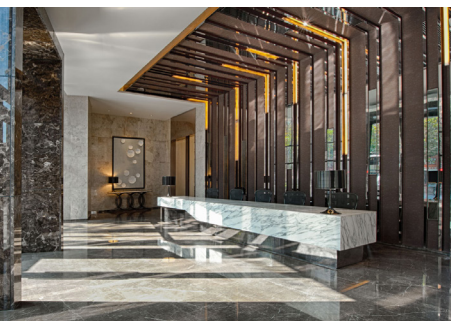

### IDEAL APPLICATIONS

Uniboard NU Green FR MDF is excellent for commercial and institutional non-structural applications such as:

- Retail and commercial spaces
- Public areas subject to fire regulations
- Interior design
- Wall partitions
- Kiosk or stand displays
- Cabinetry
- Furniture components

# NU GREEN® FR mdf TECHNICAL SPECIFICATIONS <sup>1</sup>

PROPERTIES	TYPICAL VALUE <sup>2</sup>		ANSI A208.2-2016 (GRADE 130)	
	Metric	Imperial	Metric	Imperial
Density	760 kg/m <sup>3</sup>	47.4 lb/ft <sup>3</sup>	-	
Internal Bond	0.8 MPa	116 psi	0.54 MPa	78 psi
Modulus of Rupture	24.0 MPa	3,481 psi	21.6 MPa	3,130 psi
Modulus of Elasticity	3,200 MPa	464,121 psi	2,160 MPa	313,000 psi
Screw Holding, Face (≥ 3/8")	1,200 N	270 lb	988 N	222 lb
Screw Holding, Edge (≥ 5/8")	950 N	214 lb	787 N	177 lb
Moisture Content	4 - 6%		≤ 9%	
Thickness Tolerance:	Metric	Imperial	<sup>1</sup> Technical specifications are also available for other grades at <a href="http://uniboard.com">uniboard.com</a> <sup>2</sup> Typical values measured at the Mont-Laurier mill	
	from specified thickness	± 0.125 mm		
from panel average	± 0.125 mm	± 0.005 in		
Length/Width	± 2.0 mm		± 0.080 in	
Linear Expansion	≤ 0.33%			
Flame Spread	Class A			
Smoke Development	Class A			
Thickness Swell	MR10			
Formaldehyde Emissions	NAF			

Some laminates and coatings applied to NU Green FR MDF may alter the flame spread rating. Some wood veneers and other laminates may have a reaction (including discoloration) to surface coatings and finishes, glues, temperatures, moisture, etc. the compatibility of any adhesive, wood veneers and other laminates should be confirmed with NU Green FR MDF prior to use. Uniboard is not responsible for discoloration or for any claims associated thereto. Ensure NU Green FR MDF is used in compliance with all applicable building codes. For more information, please contact your Sales Representative.



## FORMALDEHYDE EMISSIONS GRADEMARK CERTIFICATION PROGRAM

Uniboard fulfills the requirements of EPA TSCA Title VI (40 CFR 770) and/or CARB 2, CAN/CSA-0160-16, ANSI A208.1 and California Air Resources Board (CARB) Airborne Toxic Control Measures (ATCM) 93120.



## ECO-CERTIFIED COMPOSITE (ECC) CERTIFICATION



## FSC® CERTIFICATION

Uniboard is FSC® (Forest Stewardship Council®) certified for chain of custody by the Rainforest Alliance.

FSC® certified panels are available upon request.



## LEED® CONTRIBUTION

Please refer to our Documenter Center at [www.uniboard.com](http://www.uniboard.com) for current information regarding sustainable development and LEED point credits.



Although the information in this document is presented in good faith and believed to be correct, Uniboard makes no representations or warranties as to the completeness or accuracy of the information. Uniboard shall have no liability for any errors or omissions contained therein or for any consequences of same.

NEED MORE  
INFORMATION?

[www.uniboard.com](http://www.uniboard.com)

Customer Service: 1-877-864-8641  
Sales: 1-800-263-5240

redefining wood®